

## STONE CRUSHERS

# RSH

### FAE's top-of-the-line stone crushers.

RSH is FAE's most advanced stone crusher. It is suited for crushing slabs of rock and stones up to 50 cm in diameter and 50 cm deep. It works with 360-500 hp tractors and has a working width of 210-260 cm. RSH is made for difficult farmland clearing work in places where large rocks and stones need to be cleared to prepare the field for agricultural use.

Its wide opening guides large material towards the rotor and, in combination with the adjustable counterblade, helps maintain consistently high performance when working the soil.



360-500 hp



Ø 50 cm max (stones)



Depth 50 cm




**Structural frame in steel**  
maximum strength and durability  
in heavy duty operations

**Interchangeable  
Hardox® anti wear plates**  
quick and easy maintenance



**Side reduction gears and central gearbox with oilcooling system**  
maximum productivity and efficiency  
maintained in all working conditions

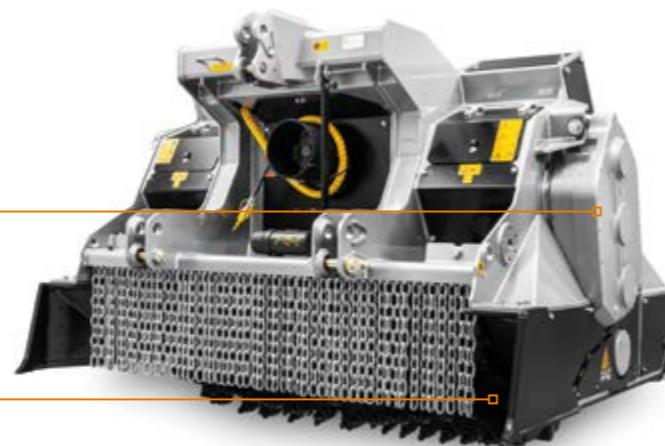

**Wide opening**  
to efficiently process more material

### MAIN OPTIONS



**Rear hood grill**  
allows larger material to be held back and crushed again for optimum results



**Adjustable steel dosing blade**  
perfect distribution of the crushed material



**Hydraulic top link**  
precise control over operations

### STANDARD EQUIPMENT

Hydraulic rear hood	Gearbox with freewheel
Interchangeable inner antiwear plates in Hardox®	Gearbox with oil cooling system
Enclosed machine body	PTO shaft
Inside lateral protection	Friction clutches
Protection chains	Bolted-on rotor shafts (in forged steel)
Transmission with side gearbox	Adjustable Hardox® counter-blade
Side gearbox with oil cooling system	Penetration skids

### OPTIONS

Bolted grid on rear hood	Hydraulic top link
Multiple tooth options	Dozing blade

MODEL	RSH/HP-200	RSH/HP-225	RSH/HP-250
<b>Tractor</b> (hp)	360-500	360-500	360-500
<b>PTO</b> (rpm)	1000	1000	1000
<b>Working width</b> (mm)	2107	2347	2587
<b>Total width</b> (mm)	2670	2910	3150
<b>Weight</b> (kg)	7050	7450	7850
<b>Max shredding diameter</b> (mm)	500	500	500
<b>ROTOR G/3</b>			
<b>Rotor diameter</b> (mm)	1115	1115	1115
<b>Working depth</b> (Max. 1-Max.2)(mm)	360-500	360-500	360-500
<b>No. teeth</b> type G/3	104	116	132
type STC/3/FP+STC/FP	4+4	4+4	4+4
<b>ROTOR R</b>			
<b>Rotor diameter</b> (mm)	1065	1065	1065
<b>Working depth</b> (Max. 1-Max.2)(mm)	345-500	345-500	345-500
<b>No. teeth/picks</b> type R/65+R/65/HD	138+24	160+24	180+24
type STC/3/FP+STC/FP	6+6	6+6	6+6

Max. 1: with rotor only Max. 2: maximum depth (maximum working depth depending on ground conditions).  
Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

### ROTOR TYPE G



**TOOTH G/3**  
(standard)



**TOOTH G/3/HD**  
(option)

### ROTOR TYPE R



**PICK R/65**  
(option)



**PICK R/65/HD**  
(option)



**TOOTH STC/3/FP**  
(side scraper)



**TOOTH STC/FP**  
(side scraper)