

## WHEEL SAWS FOR SKID STEERS

# RWM/SSL

### Disc road planer for skid steers.

The RWM/SSL is a disc-type road planer for skid steers from 75 to 135 hp, able to shred channels up to 50 cm deep with modular widths of 8, 10 or 12 cm. The RWM/SSL aims mainly to ensure extremely precise excavations for laying electrical, water, gas and fiber optic conduits. The depth indicator allows precise

depth management and the self-leveling penetration skids allow the working depth to be kept constant at all times. The optimized side output allows the track to be kept free of waste materials at all times.



75-135 hp




Depth 50 cm


**Depth Indicator**  
for precise depth control



**Self-leveling skids**  
with hydraulic depth control

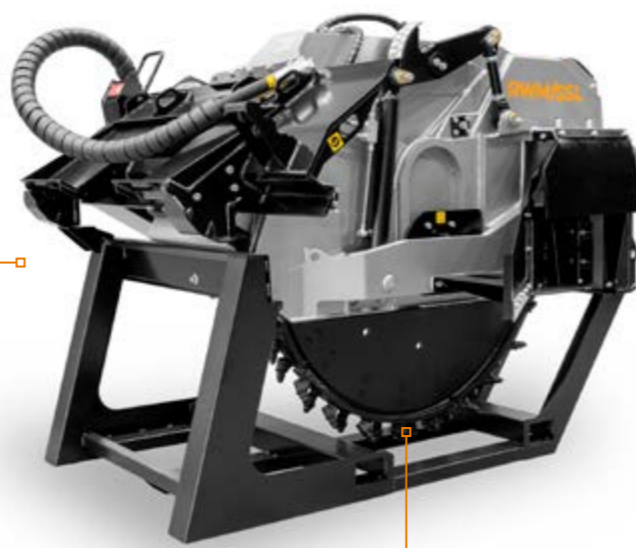


**Hydraulic drive system**  
for accurate positioning over the work area



**Modular cutting discs**  
of 3, 4 or 5 inches

### MAIN OPTIONS



**Cutting disc available in three widths**



**WSS Basic water injection system**  
to reduce dust and cool the teeth



**Wiring adaptors**  
Wiring adaptors interface to allow a Plug & Play coupling with the most popular skid steers

### STANDARD EQUIPMENT

Hydraulic working depth adjustment	Anti-shock block valve with relief and anticavitation valves
Hydraulic side shifting	Hydraulic hoses for connections
Mobile sides-frame	Interchangeable Hardox® antiwear skids plate
Enclosed / anti-dust machine body	Disc rotor with interchangeable sectors
Working pressure control gauge	Diverter valve 12 V
1500 cc fixed displacement hydraulic piston motor	Supporting service leg
Direct drive motor transmission	

### OPTIONS

Multiple disc rotor width options	Adaptor wiring
Water spray system WSS Basic	Roof mounted water tank kit for skid steer

### MODEL

### RWM/SSL

	80 mm Disc Rotor STD	100 mm Disc Rotor OPT	120 mm Disc Rotor OPT
<b>Engine (hp)</b>	75-135	75-135	75-135
<b>Requirements Flow (L/min)</b>	120-170	120-170	120-170
<b>Pressure (bar)</b>	200-350	200-350	200-350
<b>Working width (mm)</b>	80	100	120
<b>Total width (mm)</b>	1640	1640	1640
<b>Weight (kg)</b>	1315	1340	1365
<b>Working depth (mm)</b>	250-500	250-500	250-500
<b>Rotor diameter (mm)</b>	1400	1400	1400
<b>Side shifting (mm)</b>	560	560	560
<b>N° picks type R</b>	40	50	55

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

### ROTOR TYPE R



**PICK R/44/C**  
(optional)