

FORESTRY TILLERS FOR SPECIAL VEHICLES


300/TD/PT300

Demining head with fixed-tooth rotor.

The 300/TD/PT300 demining tiller has a fixed-tooth rotor designed specifically for demining work. The specially designed frame and rotor, along with the materials used, make it extremely resistant to explosions.



Depth 25 cm

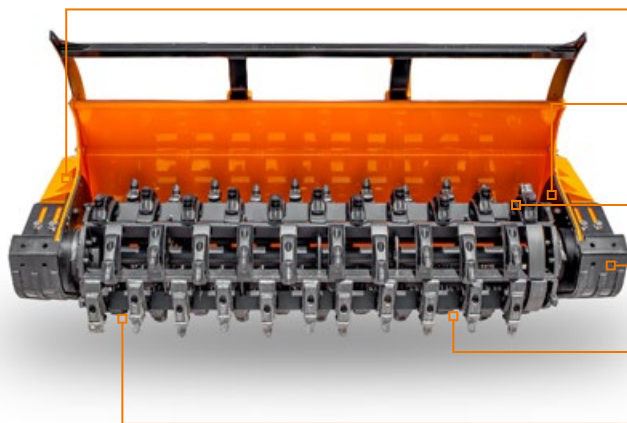

Poly Chain timing belt transmission

Side wear protection plates

D:Mine Rotor with G/3 teeth

Adjustable skids

Interchangeable protection chains

Bolt-on chain's protection plates

MODEL	300/TD/PT300-250
Head type	Demining Tiller
Working width (mm)	2500
Total width (mm)	3125
Weight (kg)	3800
Rotor diameter (mm)	885
No. teeth type G/3+STC/3/FP+BAZ	62+2+4

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



TOOTH G/3
(standard)



TOOTH G/3/HD
(option)



TOOTH STC/3/FP
(side scraper)