

WHEEL SAWS FOR SKID STEERS

RWM/SSL

Disc road planer for skid steers.

The RWM/SSL is a disc-type road planer for skid steers from 75 to 135 hp, able to shred channels up to 20 in deep with modular widths of 3.2, 4 or 4.7 inches. The RWM/SSL aims mainly to ensure extremely precise excavations for laying electrical, water, gas and fiber

optic conduits. The depth indicator allows precise depth management and the self-leveling penetration skids allow the working depth to be kept constant at all times. The optimized side output allows the track to be kept free of waste materials at all times.



75-135 hp



Depth 20 in



Hydraulic side shifting
for accurate positioning over the work area




Modular cutting discs
of 3.2, 4 or 4.7 inches


Depth Indicator
for precise depth control



Self-leveling skids
with hydraulic depth control

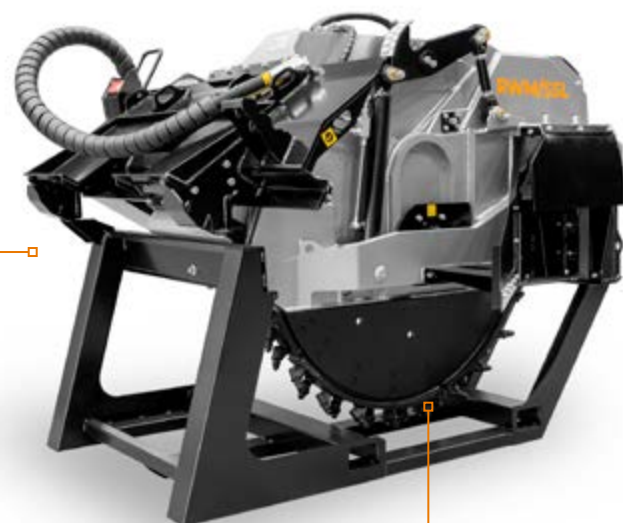

MAIN OPTIONS



Cutting disc available in three widths



WSS Basic water injection system
to reduce dust and cool the teeth



Wiring adaptors
Wiring adaptors interface to allow a Plug & Play coupling with the most popular skid steers

STANDARD EQUIPMENT

Hydraulic working depth adjustment	Anti-shock block valve with relief and anticavitation valves
Hydraulic side shifting	Hydraulic hoses for connections
Mobile sides-frame	Interchangeable Hardox® antiwear skids plate
Enclosed / anti-dust machine body	Disc rotor with interchangeable sectors
Working pressure control gauge	Diverter valve 12 V
1500 cc fixed displacement hydraulic piston motor	Supporting service leg
Direct drive motor transmission	

OPTIONS

Multiple disc rotor width options	Adaptor wiring
Water spray system WSS Basic	Roof mounted water tank kit for skid steer

MODELLO

	RWM/SSL		
	3.2 in Disc Rotor STD	4 in Disc Rotor OPT	4.7 in Disc Rotor OPT
Engine (hp)	75-135	75-135	75-135
Requirements Flow (gal/min)	32-45	32-45	32-45
Pressure (PSI)	2900-5080	2900-5080	2900-5080
Working width (in)	3.2	4	4.7
Total width (in)	65	65	65
Weight (lbs)	2900	2960	3010
Working depth (in)	10-20	10-20	10-20
Rotor diameter (in)	55	55	55
Side shifting (in)	22	22	22
N° picks type R	40	50	55

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE R



PICK R/44/C
(standard)