
FORESTRY MULCHERS

Fixed-tooth mulcher for low profile tractors.

Its compact size and design features make the UML/LOW forestry mulcher perfect for tracked or wheeled tractors, even in orchards or vineyards. It works with 60-110 hp tractors and shreds bushes, branches and trees up to 20 cm in diameter. The low PTO helps the main universal joint work at the best angle, and its frame has been reinforced to withstand the axial loads caused when steering the carrier. Choose between blades or durable teeth suitable for rocky soil.



MAIN OPTIONS

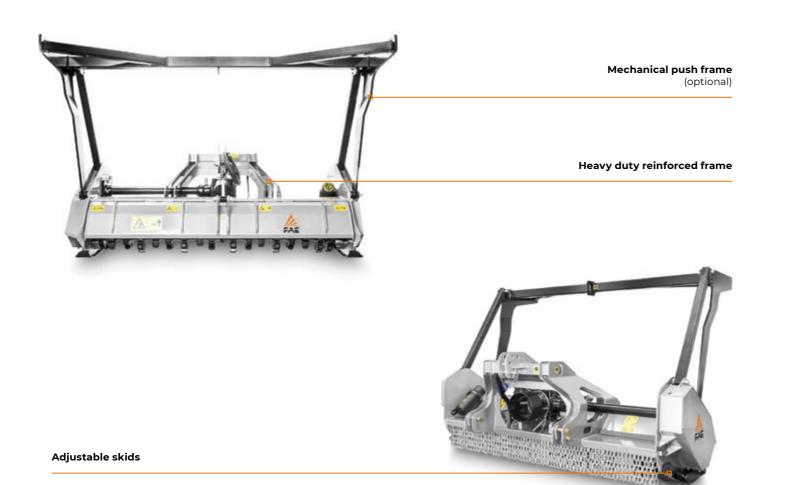

Mechanical push frame guides and pushes material away from carrier



Special skids to go underground



Mulcher designed for tractors with a low profile PTO

ROTOR TYPE C







TOOTH C/3 TOOTH C/3/HD (standard) (option)

BLADE BL (option - requires adaptor)

тоотн к/з (option)



STANDARD EQUIPMENT

Hydraulic rear hood	PT
Dual row protection chains	Bo
Transmission with belts	W
Gearbox with freewheel	Ac
Possibility to choose Transmission 540 / 1000 rpm	

OPTIONS

 (\mathcal{I})

Multiple tooth options	S
Hydraulic top link	Ν

MODEL	UML/LOW-150	UML/LOW-175	UML/LOW-200
Tractor (hp)	60-100	70-110	80-110
PTO (rpm)	540-1000	540-1000	540-1000
Working width (mm)	1582	1822	2062
Total width (mm)	1877	2117	2357
Weight (kg)	930	1060	1190
Rotor diameter (mm)	425	425	425
Max shredding diameter (mm)	200	200	200
No. teeth type C/3+C/3/SS	32+2	36+2	42+2
type I+C/3/SS	42+2	50+2	58+2

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

PTO shaft with cam clutch

Bolted-on rotor shafts (in forged steel)

Nelded steel counter-blades

Adjustable skids

Special skids to go underground

Mechanical guard frame

ROTOR TYPE I



