

## FORESTRY MULCHERS

# PaTrizio

### FAE's small mulcher with Bite Limiter technology for tractors.

PaTrizio mulcher works on trees branches and bushes up to 15 cm in diameter and is great for mulching pruning debris. The rotor features Bite Limiter technology. Steel limiter rings limit the depth of cut, reducing power demand and guaranteeing exceptional performance.

PaTrizio has adjustable and interchangeable bolted skids, two rows of counter blades for fine, even mulching, a hydraulic hood with built-in cylinder protected by the machine body, and a heat-treated forged-steel tooth holder with BL/MINI blades and C/3/MINI teeth.



50-100 hp



Ø 15 cm max



Two rows of counter blades for finer mulching



Bite Limiter rotor special steel profiles limit the depth of cut




Hydraulic hood for optimal mulching, reduces the ejection of mulched material

Two rows of screwed chains limits mulched material output



Adjustable skids for adjusting the rotor's penetration of the ground

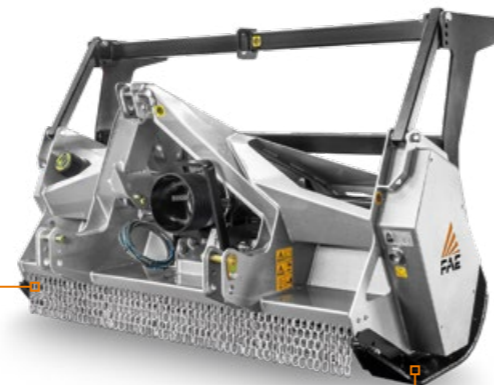

#### STANDARD EQUIPMENT

Hydraulic rear hood	PTO shaft with cam clutch
Enclosed machine body	Bolted-on rotor shafts (in forged steel)
Cylinder protection	Bite Limiter Rotor
Protection chains	Welded steel counter-blades
Transmission with belts	Adjustable skids
Gearbox with freewheel	

#### OPTIONS

Frontal attachment	Hydraulic top link
Multiple tooth options	Mechanical guard frame
Possibility to choose transmission 540 / 1000 rpm	


MODEL	PaTrizio-150	PaTrizio-175	PaTrizio-200
Tractor (hp)	50-100	50-100	50-100
PTO (rpm)	540-1000	540-1000	540-1000
Working width (mm)	1480	1720	1960
Total width (mm)	1746	1986	2226
Weight (kg)	780	880	980
Rotor diameter (mm)	370	370	370
Max shredding diameter (mm)	150	150	150
No. blades type BL/MINI	28	32	36

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

#### MAIN OPTIONS



Mechanical guard frame guides the material before mulching



Frontal attachment



BLADE BL/MINI (standard)



TOOTH C/3/MINI (option)