

## FORESTRY MULCHERS FOR SKID STEERS

# BL1/SSL

### Forestry mulcher for skid steers starting at 45 hp.

The BL1/SSL forestry mulcher for 45 to 65 hp skid steers can shred material up to 10 cm in diameter. The Bite Limiter technology on this head is ideal for high productivity in managing vegetation, with reliably efficient shredding. The head is designed to guarantee


high reliability and make maintenance easier. The high-visibility profile helps the operator optimize their work. The BL1/SSL can be equipped with blades and C/3/MINI teeth.



45-65 hp



Ø 10 cm max

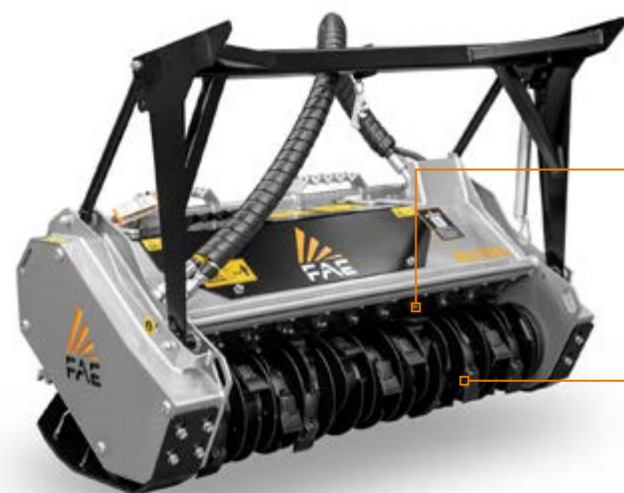

**Interchangeable Spike Pro counter blades**  
for finer mulching

**Rotor with Bite Limiter technology**  
maximum productivity with minimum power thanks to the special high-resistance steel inserts and BL/MINI blades.



**The high-visibility profile**  
helps the operator optimize work



**VT (Variable Torque) Motor**  
with automatic torque management

#### STANDARD EQUIPMENT

55 cc VT variable displacement hydraulic piston motor	Interchangeable Spike Pro counter-blades
Integrated hydraulic block with relief and anti-cavitation valves and hydraulic brake	Hydraulic hoses for connections
V-belts transmission	Mechanical adjustable guard frame
Enclosed / anti-dust machine body	Interchangeable protection chains
Motor enclosed in the frame	Interchangeable and adjustable support skids
Bite Limiter rotor	


#### OPTIONS

Customized setting hydraulic motor	Tooth options
Deflector	

MODEL	BL1/SSL/VT-125	BL1/SSL/VT-150
<b>Engine</b> (hp)	45-65	45-65
<b>Flow rate</b> (L/min)	50-100	50-100
<b>Pressure</b> (bar)	180-350	180-350
<b>Working width</b> (mm)	1240	1480
<b>Total width</b> (mm)	1476	1716
<b>Weight</b> (kg)	570	660
<b>Rotor diameter</b> (mm)	310	310
<b>Max shredding diameter</b> (mm)	100	100
<b>No. blade</b> type BL/MINI	24	28

*Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.*

#### MAIN OPTIONS



**VT Motor setting**  
Customized motor setting to obtain the maximum performance out of any hydraulic system

#### ROTOR TYPE BL



**BLADE BL/MINI**  
(standard)



**TOOTH C/3/MINI**  
(option)